JCH35A10/A11 Hand Control



Application field - Medical Line
Preferably in the medical industries.

JCH35A10/A11 is the handset specially designed for patient lift market. It has “Power display”“Overload reminder” as well “maintenance warning”. It has 2 fixtures for variable appliances: hitch and magnetic attach. Excellent water-proof performances makes the clean easier.

General Features


Button amount:	Max.6 buttons
Colour:	Gray
Supporting control boxes:	JCB35K3
IP grade:	Max.IPX6
Custom:	Panel color and style can be customized
Drive up:	3 actuators simultaneously
Approval:	RoHs

Usage


Operating Temperature:	+5 °C to +40°C
Storage Temperature:	-10°C to 50°C
Relative Humidity:	20% to 80%, non-condensing
Atmospheric Pressure:	860 to 1060 hPa
Altitude:	Max. 2000m

Dimension Drawing

JCH35A10 (with hitch)

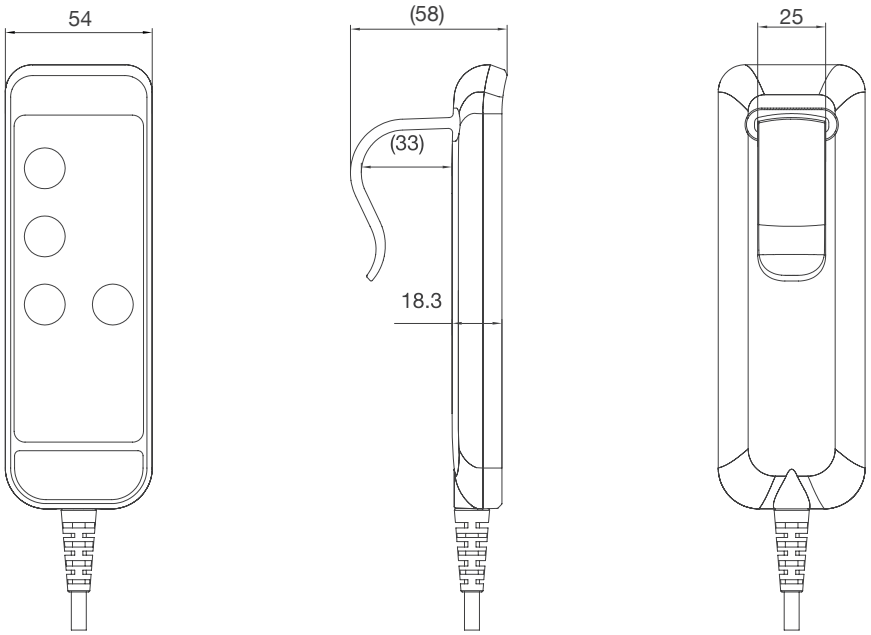

JCH35A11 (magnetic attached)

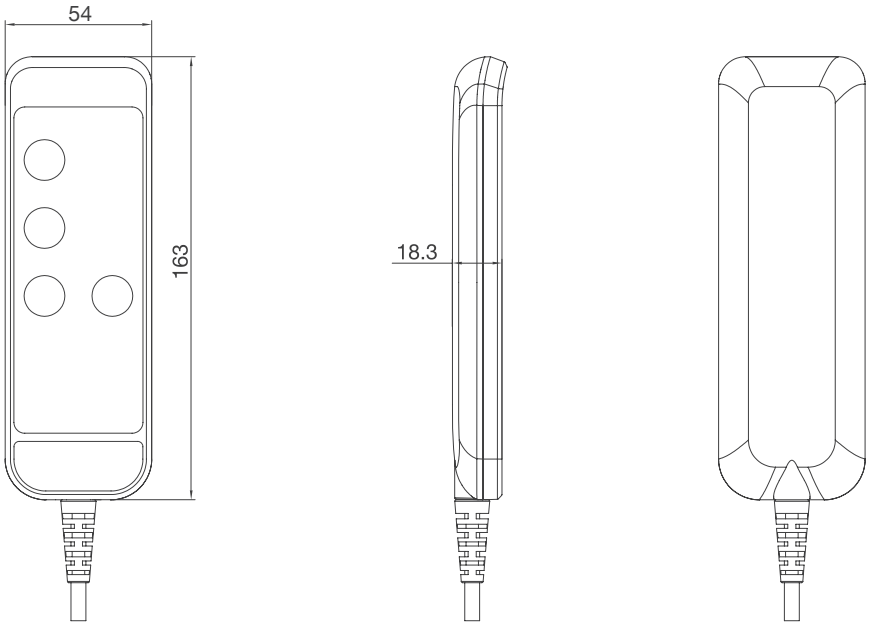

Ordering Examples

Take **JCH35A10B3G00110P14D00** for example


Model	**JCH35A10/JCH35A11**	
Background light	**X**	A = With background light / B = Without background light
Button rows	**X**	1~3
Color	**X**	G = Gray / B = Black
Panel code	**X**	001 = JCH35A10-001 (Please refer to JCH35A10 standard panels)
Cable plug code	**XXX**	8L1 = 8pin DIN plug of spring cable 10P1 = 10pin crystal elbow flex plug of spring cable
Cable length	**XXX**	4D0 = 4.0M
Action	**X**	0 = Single action / L = Linkage action

Standard panel

Please kindly check the panel functions when placing orders.



JCH35A10-004




JCH35A10-001




JCH35A10-010


Plug


8 pin DIN plug: straight cable: 8D1, coiled cable: 8L1 (suitable for Jiecang straight plug control box)







13 pin Din plug: straight cable:13D1, coiled cable: 13L1 (suitable for Jiecang straight plug control box)





10 DIN RJ elbow flex coiled cable:
straight cable:10H1; coiled cable: 10P1 (matching with control boxes JCB35T2, JCB35T3 and JCB35T6)





Note: The number of matching actuators is different, and the matching control box model is different, and the plug code will be different. Please contact the salesman in the corresponding area of Jiecang for confirmation before placing an order.

Strictly abiding by medical safety certifications

Passed EMC tests. To ensure our products pass all kinds of tests domestic or abroad.

Communication protocol development

Aiming at different applications, develop more extensive functions for control system.

Professional customization

Powerful R&D strength, fully satisfy customers' needs. Development cycle is about 10 days, seizing more market opportunities

Intelligent Control of Bluetooth

Mobile phone as the remote, applying in home care. Market pioneer, Jiecang provides better choices

Wireless Communication

Controllers adopt high-frequency wireless system. It can avoid interference mixing with signal receivers, assisting in remote control over medical equipment.

Latest Weighing System

Designed for physiotherapy beds and medical care beds. Cantilever carrying weighing sensor, it is applicable to different bedsteads dispensing with any adjustment

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG' s product are constantly improving, it is possible to make changes to JIECANG' s product without prior notice. Therefore, JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product.

Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.

Notes for mounting and usage can be found in the corresponding mounting manual

TECHNOLOGY
DRIVES INTELLIGENT LIFE